



# **MASTER PL-L 4 Pin**

## MASTER PL-L 18W/840/4P 1CT/25

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 2 parallel fluorescent tubes

#### **Warnings and Safety**

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

Operating and Electrical			
Power Consumption	18.0 W		
Lamp Current (Nom)	0.375 A		
General Information			
Cap-Base	2G11 [2G11]		
Flux measurement reference	Sphere		
Light Technical			
Color Code	840 [CCT of 4000K]		
Luminous Flux	1,200 lumen		

Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	0.38
Chromaticity Coordinate Y (Nom)	0.38
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	67 lm/W
Color rendering index (CRI)	80
Controls and Dimming	
Dimmable	Yes


Datasheet, 2023, April 15 data subject to change

## **MASTER PL-L 4 Pin**

Approval and Application		
Energy Efficiency Class	G	
Mercury (Hg) Content (Max)	2 mg	
Mercury (Hg) Content (Nom)	2.0 mg	
Energy Consumption kWh/1000 h	18 kWh	
EPREL Registration Number	423263	
Product Data		
Full product code	871150070669040	


Order product name	MASTER PL-L 18W/840/4P 1CT/25
Order code	927903008470
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material number (12NC)	927903008470
Full product name	MASTER PL-L 18W/840/4P 1CT/25
EAN/UPC - Case	8711500610652

### Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L 18W/840/4P 1CT/25	39.0 mm	18.0 mm	194.2 mm	220 mm	226.6 mm

#### Photometric data

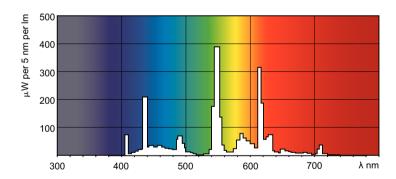

Spectral Power Distribution Colour - MASTER PL-L 18W/840/4P 1CT/25



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.