

LEDVANCE Luminaires

DUAL SELECTABLE BULLET FLOOD

PERFORMANCE CLASS

Application

The Dual Selectable Bullet Flood is an all-in-one solution for your flood lighting needs. With its color selectability, wattage selectability, and beam angle adjustment, you can light anything you need with one simple solution. Common areas where this fixture can be utilized are landscape areas, flag light, and building facades.

Benefits and Features

- Multiple beam angles available: 15, 25 or 40 degrees flood optics adjustable with the quick lenses change (included in the box).
- Up to 140 LPW
- 3000K/4000K/5000K selectable color temperature
- CRI >80
- 3 selectable wattages: 10.5/20/30W
- Energy savings up to 80%

Electrical

- 120-347 V_{AC}
- Power Factor >0.9
- THD <20%
- 0-10V dimmable

Rated Life

- 100,000 hours (L₉₀)

Warranty

- 5-year
- NLB Trusted Warranty Program

Ambient Operating Range

- -40°F to +104°F (-40°C to +40°C)

Certifications and Listings

- cULus listed to UL1598 standards, wet location
- RoHS
- FCC
- DLC 5.1 Premium
- IP66
- IK08



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
50W Halogen	50	10	80%
75W Halogen	75	20	73%
90W Halogen	90	20	78%
35W HPS	42	20	52%
35W HPS	42	30	29%
50W HPS	62	30	52%
90W Halogen	90	30	67%
150W Halogen	150	30	80%
70W HPS	91	30	67%
100W HPS	120	30	67%
100W MH	130	30	69%

Installation

- 1/2" IPS threaded knuckle



Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Guide


BULLTFL	2A	/	S030	UNH	D	8	SC2	/	XX
Product Name	Generation		Wattage	Voltage	Dimming	CRI	Color Temp		Color/Finish
BULLTFL = Bullet Flood Luminaire	2A = Generation 2A		S030 = 10.5/20/30W	UNH = 120-347V	D = 0-10V	8 = >80 CRI	SC2 = 3000/4000/5000K		BZ = Bronze BL = Black GR = Gray

Ordering Information


Item Number	Ordering Abbreviation	Power (W)	Input Voltage	Dimming	CRI	Color Temp (CCT)	Total Fixture Lumens (lm)	LPW	Color/Finish	DLC
63194	BULLTFL2A/S030UNHD8SC2/BZ	10.5/20/30W	120-347V	0-10V	>80	3000/4000/5000K	1400/2800/4200	Up to 140	Bronze	5.1 Prem.
63195	BULLTFL2A/S030UNHD8SC2/BL	10.5/20/30W	120-347V	0-10V	>80	3000/4000/5000K	1400/2800/4200	Up to 140	Black	5.1 Prem.
63196	BULLTFL2A/S030UNHD8SC2/GR	10.5/20/30W	120-347V	0-10V	>80	3000/4000/5000K	1400/2800/4200	Up to 140	Gray	5.1 Prem.

Physical Information

Lamp Description	Length (in)	Width (in)	Height (in)	Weight (lbs)
BULLTFL2A	6.53	6.16	8.51	5

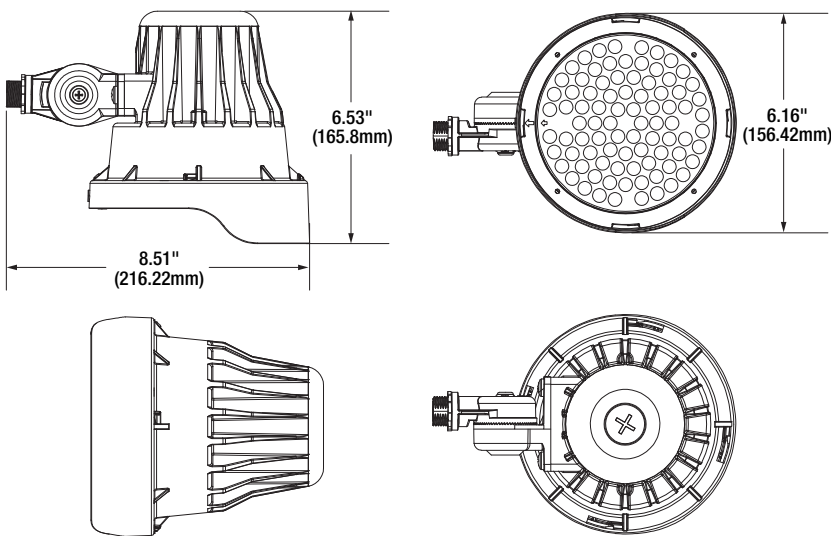

Photometric Information

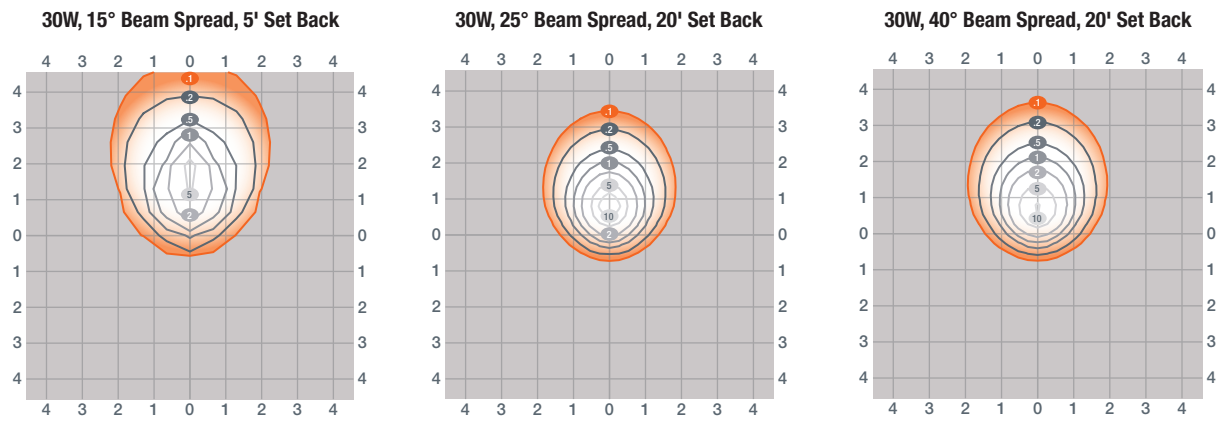


Accessories

Item Number	Ordering Abbreviation	Item Description
60687	BULLTFLD2A/LARGEVISOR/BZ	Large Visor, bronze finish
63225	BULLTFLD2A/LARGEVISOR/BL	Large Visor, black finish
63226	BULLTFLD2A/LARGEVISOR/GR	Large Visor, gray finish
60689	GRDSTAKE1A	Garden Stake
60688	TENONADAPTER1A/BZ	Tenon Adapter, bronze finish
61169	TENONADAPTER1A/BL	Tenon Adapter, black finish
61170	TENONADAPTER1A/GR	Tenon Adapter, gray finish



Tenon Adapter

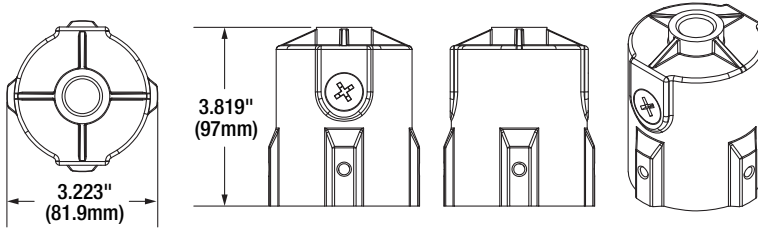

LEDVANCE LLC
 181 Ballardvale Street, Suite 203
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

LEDVANCE is a registered trademark. All other trademarks are those of their respective owners. Specifications subject to change without notice.



SCAN TO FOLLOW US
 ON SOCIAL MEDIA

