


Basic data

Nominal Wattage [W]	Rated Power [W]	Energy consumption [kWh/1000h]	Volts [V]	Cap	Product Description	Product Code	Nominal Lumen [lm]	Rated Lumen [lm]	Rated Lamp Efficacy [lm/W]	CCT [K]	CRI [Ra]	Mercury [mg]	Life on 3h Standard Gear [h]	Diameter [mm]	Length [mm]	EEC	Pack Qty
Biax™ S 2-pin, Internal Starter																	
5	5.4	7.15	35	G23	F5BX/SPX27/827	37654	265	265	49	2700	82	1.3	10,000	32	107.5	B	10
5	5.4	7.15	35	G23	F5BX/SPX41/840	37661	265	265	49	4000	82	1.3	10,000	32	107.5	B	10
7	7.1	9.18	47	G23	F7BX/SPX27/827	37846	425	425	60	2700	82	1.3	10,000	32	136.5	A	10
7	7.1	9.18	47	G23	F7BX/830	38930	425	425	60	3000	82	1.3	10,000	32	136.5	A	10
7	7.1	9.18	47	G23	F7BX/SPX35/835	37659	425	425	60	3500	82	1.3	10,000	32	136.5	A	10
7	7.1	9.18	47	G23	F7BX/SPX41/840	37660	425	425	60	4000	82	1.3	10,000	32	136.5	A	10
7	7.1	9.18	47	G23	F7BX/865	38984	425	425	60	6500	82	1.3	10,000	32	136.5	A	10
9	8.7	11.05	60	G23	F9BX/827	37651	600	600	69	2700	82	1.3	10,000	32	167	A	10
9	8.7	11.05	60	G23	F9BX/830	38929	600	600	69	3000	82	1.3	10,000	32	167	A	10
9	8.7	11.05	60	G23	F9BX/SPX35/835	37652	600	600	69	3500	82	1.3	10,000	32	167	A	10
9	8.7	11.05	60	G23	F9BX/SPX41/840	37653	600	600	69	4000	82	1.3	10,000	32	167	A	10
9	8.7	11.05	60	G23	F9BX/865	38985	600	600	69	6500	82	1.3	10,000	32	167	A	10
11	11.8	14.69	91	G23	F11BX/827	37663	900	900	76	2700	82	1.3	10,000	32	237	A	10
11	11.8	14.69	91	G23	F11BX/830	38928	900	900	76	3000	82	1.3	10,000	32	237	A	10
11	11.8	14.69	91	G23	F11BX/835	37666	900	900	76	3500	82	1.3	10,000	32	237	A	10
11	11.8	14.69	91	G23	F11BX/840	37664	900	900	76	4000	82	1.3	10,000	32	237	A	10
11	11.8	14.69	91	G23	F11BX/840	38986	900	900	76	6500	82	1.3	10,000	32	237	A	10
Biax™ S/E 4-pin, External Starter Required																	
5	5.4	5.50	35	2G7	F5BX/827/4P	37714	265	265	49	2700	82	1.3	15,000	37.5	92	A	10
5	5.4	5.50	35	2G7	F5BX/840/4P	37715	265	265	49	4000	82	1.3	15,000	37.5	92	A	10
7	7.1	7.15	47	2G7	F7BX/827/4P	37658	425	425	60	2700	82	1.3	15,000	37.5	121	A	10
7	7.1	7.15	47	2G7	F7BX/840/4P	37716	425	425	60	4000	82	1.3	15,000	37.5	121	A	10
9	8.7	8.80	60	2G7	F9BX/827/4P	37710	600	600	69	2700	82	1.3	15,000	37.5	151	A+	10
9	8.7	8.80	60	2G7	F9BX/840/4P	37711	600	600	69	4000	82	1.3	15,000	37.5	151	A+	10
11	11.8	12.10	91	2G7	F11BX/827/4P	37717	900	900	76	2700	82	1.3	15,000	37.5	222	A+	10
11	11.8	12.10	91	2G7	F11BX/840/4P	37713	900	900	76	4000	82	1.3	15,000	37.5	222	A+	10
11	11.8	12.10	91	2G7	F11BX/865/4P	12603	900	900	76	6500	82	1.3	15,000	37.5	222	A+	10

Dimensions

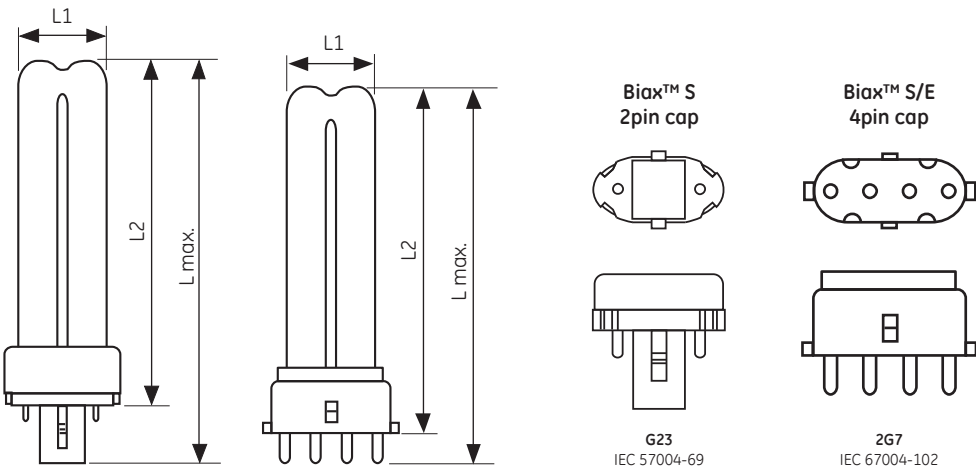

	L max [mm]	L1 [mm]	L2 [mm]
Biax™ S			
5W	107.5	27	85
7W	136.5	27	114
9W	167	27	144.5
11W	237	27	214.5
Biax™ S/E			
5W	92	27	85
7W	121	27	114
9W	151	27	144
11W	222	27	215